

# CERAMAGUARD (100% RH)

CI/SfB (35) Xy 09/2010



[www.armstrong.eu](http://www.armstrong.eu)



# CERAMAGUARD (100% RH)



Recycled Content



Light Reflectance



Intelligibility

## CERAMAGUARD

## BOARD



Prelude XL<sup>2</sup>/ TLX / Corrosive Resistant 24 mm / Clean Room Grid 24 mm



600 x 600 x 15 mm  
600 x 1200 x 15 mm


607 M  
608 M



EN ISO 354 &  
EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
<b>0.55(MH)</b>	0.60	0.25	0.30	0.50	0.80	0.85	0.75	$\alpha_p$

Sound Absorption Class = D

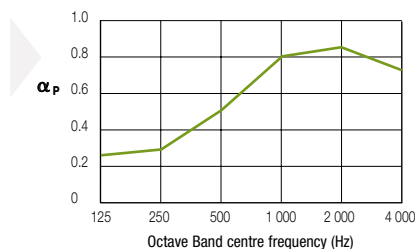

EN 20140-9  
& EN 717-1

Dncw  
39 dB



EN 13501-1

EEA Euroclass A1

RUS NG to FZ 123



EN 12667  
& ISO 8301

$\lambda = 0.067$  W/m K



100 % RH



15 YEAR  
guarantee



$\approx 7$  kg/m<sup>2</sup>  
20 kg/m<sup>2</sup> if wet

- Please contact our Internal Technical Sales Group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.
- За более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.

[www.armstrong.eu](http://www.armstrong.eu)

**Armstrong**