

# NEWTONE (100% RH)

CI/SfB (35) Xy  
09/2010



[www.armstrong.eu](http://www.armstrong.eu)

**Armstrong**<sup>®</sup>

# NEWTONE (100% RH)



Light Reflectance

Confidentiality

NEWTONE

BOARD



Prelude XL<sup>2</sup> / TLX 24 mm / Corrosive Resistant 24 mm / Clean Room Grid 24 mm

6mm

600 x 600 x 6 mm


1201 M



EN ISO 354 & EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
<b>0.10(L)</b>	0.10	0.25	0.15	0.10	0.10	0.10	0.05	<b><math>\alpha_p</math></b>

Sound Absorption Class = Not classified

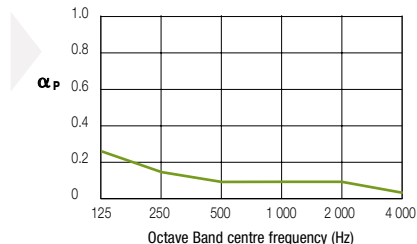

EN 20140-9 & EN 717-1

Dncw  
37 dB



EN 13501-1

EEA Euroclass A2-s1, d0

RUS KMO (NG) FZ123



100 % RH

15 YEAR  
guarantee



≈ 6 kg/m<sup>2</sup>

- Please contact our Internal Technical Sales Group for further details.  
 - Pour de plus amples informations merci de contacter notre Service Information Plafonds.  
 - Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.  
 - Voor meer informatie kunt u contact opnemen met Market Service Center.  
 - Per ulteriori dettagli consultare il nostro Ufficio Commerciale.  
 - Para más detalles, por favor, contacte con el Servicio de Información de Techos.  
 - W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.  
 - За более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.

[www.armstrong.eu](http://www.armstrong.eu)

**Armstrong®**