

# **STRONG · EASY · SECURE**



## **An innovation in main runners**

Armstrong introduces Peakform, an advanced design of main runner for suspended ceilings.

The new bulb shape and taller profile is designed to create a stronger, stable main runner, making installation both faster and easier.




**TRULOK PRELUDE 24 XL**


24mm Exposed Suspension System (nominal)

**Physical Data**


- **Material**  
Double-web galvanised steel
- **Surface Finish**  
Baked polyester paint
- **Product Family**  
Exposed tee system
- **Main Runner/Cross Tee Interface**  
XL joggled ends
- **End Detail**  
Main Runner : bulb-to-bulb connection, staked-on **Superlock** clip, single stitching  
XL Cross Tee : staked-on stab clip, double stitching
- **Fire Rating**  
Armstrong have an extensive range of grid and tile products which can provide fire and/or structural protection. Please contact Internal Technical Sales Group for the relevant grid and tile combination.

**Accessories**


BPA 10230 A\* Bottom part of nonius hanger




BPA AWDN 20 A\* Bent tee bar hanger for threaded rod



BPA 829 B\* Suspension hanger for tee bar



BPA 7898 A\* Direct ceiling load clip


**Load Capacity**Maximum Load = 14kg/m<sup>2</sup>  
(for span (L) deflection limit = L/360)

Test data provided by Stangers Materials Science Laboratories, UK

For other span (L) deflection limits, please multiply the allowable load by the factor indicated:

Span (L) deflection limit	L/300	L/360	L/400	L/500
Multiplier	1.2	1	0.9	0.72

1 BP 31 40 32A 2 BP 31 30 52 3 BP 31 20 21A

**Accessories (continued)**


BPA 819 B Locking hold down clip




BPA 7912 40mm soft fibre panel clip




BPA 7902 18/25mm soft fibre panel clip




BPA 820 B Retaining clip for 15mm tiles (Tegular/MicroLook)



BPA 828 B Retaining clip for 15mm Board panels



BPAC 1430 A\* Variable placement Hook End Detail



BPA 7878 A\* Exterior hold down clip

All measurements in millimetres

\* Suitable for Peakform main runners

Please contact Internal Technical Sales Group for further details.

**United Kingdom**  
Armstrong World Industries Ltd.  
Building Products Division  
Armstrong House  
38 Market Square  
Uxbridge  
Middlesex UB8 1NG  
Freefone : 0800 37 18 49  
Fax : +44 (0)1895 274 287  
[www.armstrong-ceilings.co.uk](http://www.armstrong-ceilings.co.uk)  
e-mail: [sales-support@armstrong.com](mailto:sales-support@armstrong.com)

**Republic of Ireland**  
Armstrong World Industries Ltd.  
Sales Office  
5 The Village Centre  
Lucan  
Co Dublin  
Freefone : 1800 409 002

**Africa, Middle East, Turkey Division**  
Armstrong World Industries Ltd.  
Armstrong House  
38 Market Square  
Uxbridge UB8 1NG  
United Kingdom  
Tel: +44 (0) 1895 251122  
Fax: +44 (0) 1895 272928  
<http://ceilings-eu.armstrong.com>

Israel: [www.armstrong.co.il](http://www.armstrong.co.il)  
South Africa: [www.armstrong-ceilings.za](http://www.armstrong-ceilings.za)  
Turkey: [www.armstrong.com.tr](http://www.armstrong.com.tr)  
e-mail: [sales-support@armstrong.com](mailto:sales-support@armstrong.com)

All product specifications are subject to modifications without prior notice

PG 2203.2


**Armstrong**

## TRULOK PRELUDE 24 XL 24mm Exposed Suspension System (nominal)


### Key Attributes

- **Peakform** patented universal main runner profile for installation either with Prelude XL stab-end cross tees or with Prelude TL hook-end cross tees
- The **Peakform** bulb design increases strength and stability for improved performance
- **Superlock** main runner clip engineered for a strong, secure connection and fast accurate alignment confirmed with an audible click
- Easy to cut thanks to the **Peakform** bulb
- Rotary stitched for additional torsional strength and extra stability during installation
- Slots at 100 mm centres for more flexibility (3600 mm long main runner)
- Prelude XL cross tees with staked-on stab-end clip detail and joggled at each end
- Easy to remove and relocate
- Armstrong Global White

### Peakform Main Runner 24 with Superlock Clip




Item Nr.	Dimensions		Content / Carton		Weight / Carton	Carton / Pallet
	length (mm)	height (mm)	pcs	lm	kg	
BP 31 40 32 A*	3600	43	20	72,00	21,00	30
BP 31 43 33 A	3375	43	20	67,50	21,00	30




BP 31 40 32 A*	50	100	33 x 100	100	50
BP 31 43 33 A	337,5	675	2 x 675	675	337,5



### Cross Tee Prelude 24 XL Stab System



BP 31 30 51 A *	1200	35	60	72,00	16,80	72
BP 31 30 52	1200	35	60	72,00	21,20	72
BP 31 30 21 B	1200	30	60	72,00	16,25	72

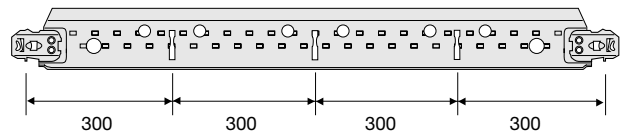

BP 31 20 21 A *	600	30	60	36,00	8,20	144
BP 31 24 51	300	35	120	36,00	9,20	96

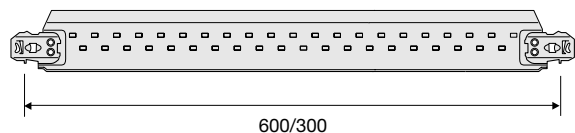

All measurements in millimetres

\*Colours available : Opal (OL), Carrara (CA), Platinum (PN), Black (BK), Red (RD), Blue (BE), Green (GN), Ivory (IY), Aluminium (AL), Brass (BS), Chrome (CE), Brown (BN), White RAL 9010 (WR).

Cross tee alignment is achieved by locating the tees to the right-hand side of the adjoining section.



**An innovation in main runners**

## STRONG

### **PeakForm™ - strong but light**

The new high performance main runner has been engineered to provide a stable, stronger, easier to use product, together with a hot-dipped galvanised steel coating for extra protection.

## EASY

### **PeakForm™ makes it easy**

Successful installation is dependant on being able to keep main runners straight and level, this is where Peakform comes into its own. Peakform main runners are manufactured using the patented rotary-stitching process which mechanically binds the double web together giving Peakform™ its unique strength and stability and above all reducing twist. It doesn't stop there, Peakform cartons are lighter making handling and loading easier too.

### **PeakForm™ - a cut above the rest**

The newly designed profile of Peakform makes cutting easier than the traditional square bulb and the cuts themselves are smoother and cleaner.

## SECURE

### **PeakForm™ - locked securely**

Superlock is a new feature of Peakform, insertion is easy, more secure and alignment and stability is improved. With a lateral connect and disconnect it is easier to install and remove in low clearance areas or in the centre of a room.



Discover how easy and fast your next installation can be when you choose Peakform.

For more information contact Internal Technical Sales Group.

